

HP Designjet H35000 Printer series

Add versatility to your business with this affordable, intelligently designed printer series that converts easily from a roll-fed to a flatbed printer. Print directly on rigid display boards or flexible media using UV-curable inks with built-in HP quality.



Impressive results in an affordable, reliable printer.

- **Produce the print quality your customers demand.** Piezo printheads deliver variable-sized micro droplets of ink to achieve resolutions of 600 x 300, 600 x 600, and 1200 x 600 dpi. The six-color HP Designjet H35500 Printer delivers even higher apparent image quality—up to 1800 dpi.
- **Command attention.** HP Designjet 788 inks and variable drop-size printheads combine to produce a greater image detail and smoother color transitions across a wide variety of media.

Add the roll-fed and rigid media versatility you need.

- **Choose the media you want and print directly on it—no mounting required.** Print on flexible roll-fed materials such as banner vinyl, adhesive vinyl, canvas, paper, and backlit film or print directly on rigid material up to 2.5 cm thick and 244 cm in length. No laminating, transferring, or mounting required.
- **Reduce your printer's footprint without reducing functionality.** Designed to fit any space, this well-designed, hybrid UV printer easily converts from a roll-fed to a flatbed printer, minimizing floor space. The tables extend outward from 91.4 to 152.4 cm to support board lengths up to 244 cm.
- **Save valuable time and cut costs.** Because the ink cures quickly with UV light exposure, you no longer need to wait for media to dry. Media is ready to go immediately, straight from the printer. And because you can print directly on rigid media, you no longer need to spend the extra time and material expense for mounting or laminating.

Work smarter with less effort with renowned HP quality.

- **Enjoy worry-free, self-service operation.** HP continues to build on years of experience to deliver the built-in reliability and ease-of-use your business expects from our products. HP engineers have thought through every detail. Designed for simplicity, this hands-off printer eliminates any need to clean the printheads manually and ensures that the printer is always ready to print.
- **What you used to do manually, the printer will do for you automatically.** The printer senses media edges and adjusts the print image precisely to the media position. Automatic printhead height adjustment allows the printer to accept and adjust to rigid sheet-fed media up to 25 mm thick.
- **Maximize usability and minimize training costs.** Redefine usability and minimize training time and costs with this simple, graphical, touchscreen control panel. This intuitive interface clearly displays printer status at a glance and enables easy navigation.
- **Expect accurate, consistent results from job-to-job, day-to-day, and media-to-media.** The printer aligns the printheads, ensures that every working jet fires a pixel at precisely the same location in both directions of travel, and detects individual jets that are misfiring and substitutes working jets for the missing jets. When used with the HP RIP Software, the printer performs automatic color calibrations using a high-resolution imaging sensor, photodiode, and embedded software. Get great results every time you print.
- **Experience HP's legendary quality and reliability.** To save your business time and simplify your workflow, the HP Designjet H35000 Printer series offers quality and trouble-free printing you can count on. And if you ever do need support, HP's high-quality support is among the best. Experience peace of mind, knowing you're covered.




No-drip, quick connect/disconnect HP Designjet 788 inks




Easy and intuitive 17.7 cm color touchscreen front panel

HP Designjet H35000 Printer series

1. Integrated front and rear roller tables fold down and out of the way for roll-fed operation, or fold out for printing rigid materials.
2. Automatic media thickness detection and motor-driven height adjustment to accommodate media up to 25.4 mm thick.
3. Media Edge Guides prevent head strikes caused by roll-fed media edge curl.
4. Dual-shuttered UV lamp housings eliminate special handling for various media thicknesses. User-replaceable UV bulbs lowering operating costs.
5. Printhead service station fully maintains printhead health. This hands-off design eliminates the need for wiping or dabbing of printheads and ensures the printer is always ready to produce top quality images.

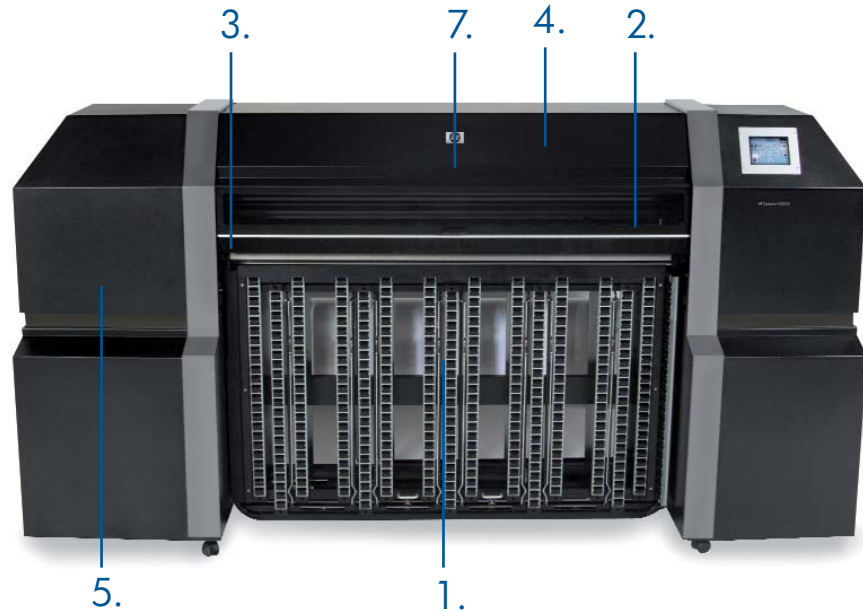

6. Built-in static elimination discharges static build-up on both top and bottom surfaces of synthetic media.
7. Fully enclosed to provide protection from moving parts and stray ultraviolet light.
8. Adjustable Media Fence keeps rigid media feeding straight and prevents media skew.

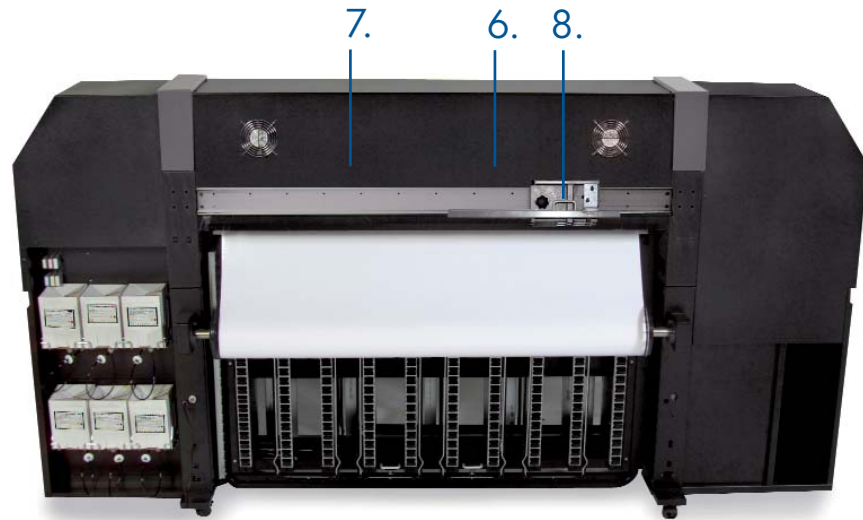

The HP Designjet H35000 Printer series is designed to fit the needs of big and small print shops and specially suited for:

- POP
- Interior decoration
- Informational signage
- Banners



HP Designjet H35000 Printer series at a glance

HP Designjet H35100 Printer

54 in/137 cm

4 colors

4 printheads (1 per color)

Hybrid configuration

Billboard print speed at 600 x 600 dpi 18 m²/hr

HP Designjet H35500 Printer

54 in/137 cm

6 colors

6 printheads (1 per color)

Hybrid configuration

Billboard print speed at 600 x 600 dpi 18 m²/hr

Advanced Automation Eye

The HP Designjet H35000 Printer series uses a high-resolution imaging sensor, colorimetric spectrophotometer, and embedded software to automate the setup and calibration steps critical for achieving and maintaining print quality.

Auto-set Calibration

Analyzes dot placement of printed patterns and automatically sets the head-to-head alignment and bi-directional (bidi) dot placement alignment to compensate for variable print speeds, head height settings, and media thickness.

Auto-jet Calibration

Eliminates banding in prints and prolongs the useful life of printheads by mapping out jets that are not up to performance standards and compensating by using other jets in their place.

Auto-tune Scheduler

Schedules the AutoJet Calibration to occur during unattended print runs to ensure maximum print quality and minimize waste or reprints.

Auto-edge and Media Out Detection

Uses the image sensor to aid in the loading of rigid materials by detecting right, left, and leading edges allowing the printer to precisely position the media to begin printing.

Color Calibration

The on-board spectrophotometer supplies color data to the external RIP's color management software to create custom ICC color profiles for your favorite 3rd party media. The color management system then adjusts the color to ensure accurate and consistent color.

Color Profiling

This optional feature uses the on-board spectrophotometer. The printer prints and automatically reads hundreds of color swatches to allow the RIP and color management software to create custom ICC and color profiles for 3rd party media.



HP Designjet H35000 Printer series

Technical specifications

Color	HP Designjet H35100: CMYK HP Designjet H35500: CMYKcm	
Printheads	HP Designjet H35100: 4 (one per color) HP Designjet H35500: 6 (one per color)	
Print speed at 600 x 600 dpi		
High quality	H35100/H35500: 4.5 m ² /hr	
Production	H35100/H35500: 9 m ² /hr	
Billboard	H35100/H35500: 18 m ² /hr	
Print resolutions	1200 x 600, 600 x 600, 600 x 300 dpi	
Print technology	Reciprocating UV-curable inkjet Print technology	
Technology resolution	1200 x 600 dpi	
Ink		
Ink types	HP Designjet 788 UV pigment inks	
Print cartridge colors	HP Designjet H35100: Cyan, magenta, yellow, black HP Designjet H35500: Cyan, magenta, yellow, black, light magenta, light cyan	
Ink cartridge size	1 liter ink supplies	
Ink drop	10 to 30 pl	
Nozzles	192 nozzles per head	
Memory	512 MB	
Media		
Handling	Integrated front and rear roller tables support rigid media up to 96 in/244 cm in length and 35 lb/15.9 kg in weight. Automatic sensing of media thickness and head height adjustment. Supports roll-fed media on 3 inch cores. Roll-fed materials such as banner vinyl, adhesive vinyl, canvas, paper, and backlit film. A wide variety of ridged board stock can be used including Coroplast, Foam-Cor, Sintra, Polystyrene, Acrylics, Corrugated, Plywood, DiBond, and more	
Types	Up to 2.54 cm thick and 15.9 kg in weight	
Thickness	61 to 137 cm	
Maximum width	27.2 kg	
Maximum roll weight		
Print margins	0.64 cm right and left margin on flexible media. Edge-to-edge available on rigid media.	
Maximum print length	Unlimited (determined by RIP software or media roll length)	
Print accuracy	0.1%	
Interface	100 Megabit VideoNet	
UV energy source	Dual, high-energy, user-replaceable UV bulbs. User-selectable Low, Medium, and High settings.	
Shipping Dimensions		
Weight	406 kg	
Height	168 cm	
Depth	91 cm	
Width	297 cm	
Assembled dimensions	Roll-fed	Tables Fully Extended
Weight	264 kg	264 kg
Height	145 cm	145 cm
Depth	70.2 cm	325 cm
Width	274 cm	274 cm
What's in the box	Four or six 1-liter inks depending on model, 1-liter Printhead flush, 54 in x 100 ft roll of UV Photobase, 25 ft VideoNet interface cable, documentation, miscellaneous supplies and accessories.	

Ordering information

CH265A HP Designjet H35100 Printer
CH266A HP Designjet H35500 Printer

Inks

CH116A HP Designjet 788 Cyan Ink
CH117A HP Designjet 788 Magenta Ink
CH118A HP Designjet 788 Yellow Ink
CH119A HP Designjet 788 Black Ink
CH120A HP Designjet 788 Light Cyan Ink
CH121A HP Designjet 788 Light Magenta Ink
CH122A HP UV Printhead Flush
CH123A HP Designjet 788 Specialty Cyan Ink
CH124A HP Designjet 788 Specialty Cyan Ink
CH125A HP Designjet 788 Specialty Yellow Ink
CH126A HP Designjet 788 Specialty Black Ink
CH127A HP Designjet 788 Specialty Light Cyan Ink
CH128A HP Designjet 788 Specialty Light Magenta Ink

RIPs

CH224A HP with Color Profiling RIP Software

HW accessories

CH231A HP DJ H35000/H45000 UV Replacement Bulb
CH232A HP DJ H35000/H45000 Fume Exhaust HW
CH233A HP DJ H35000/H45000 Floor Switch
CH151A HP 12-pack UV Lamp Air Filter
CH238A HP 12 Un.Lint-free Clean.Cloth Material
CH239A HP 150 Un.Lint-free Clean.Cloth Material

Operating environment

Electrical	220-240 VAC, single phase, 50/60 Hz, 16 Amps maximum.
Operating temperature	68° to 85° F (20° to 30° C)
Operating humidity	20% to 80% Relative Humidity, non-condensing
Warranty	One year on-site parts and labor. Extended warranties available.
Agency compliance/Certification	Safety: CE, UL, c-UL Emissions: CE, FCC-A Immunity: CE RoHS certified

© 2008 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For more information, visit our website at www.hp.com

